


WORKING RANGE


Model			KX080-3	
A	Max. digging height	mm	7300	
B	Max. dumping height	mm	5250	
C	Max. digging depth	mm	4600	
D	Max. vertical digging depth	mm	3850	
E	Max. digging radius at ground	mm	7170	
F	Max. digging radius	mm	7330	
G	Min. turning radius	w/o swing	mm	2490
		w/ swing	mm	2000
H	Min. tail turning radius	mm	1460	

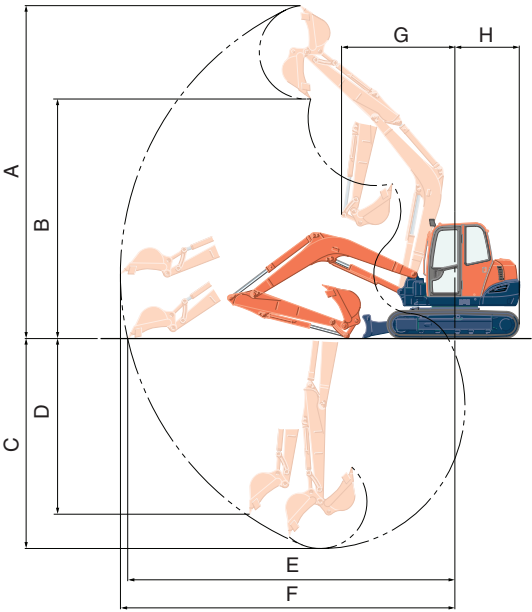

LIFTING CAPACITY

LIFT POINT HEIGHT (m)		LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=ton			LIFTING CAPACITY OVER-SIDE unit=ton		
		LIFT POINT RADIUS (m)			LIFT POINT RADIUS (m)		
		3	5	MAX	3	5	MAX
GL	3	2.15	1.60	1.55	2.15	1.25	0.90
	2	3.30	1.80	1.55	2.55	1.20	0.80
	1	4.10	2.00	1.60	2.30	1.10	0.80
	0	4.25	2.10	1.60	2.20	1.05	0.80

Machine with cabin and rubber crawler, without bucket

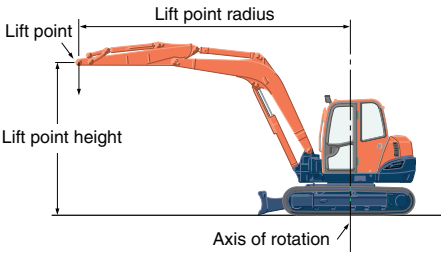

©2008 Kubota Corporation



KUBOTA Tractor Australia Pty Ltd

Freecall: 1800 334 653

Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

