
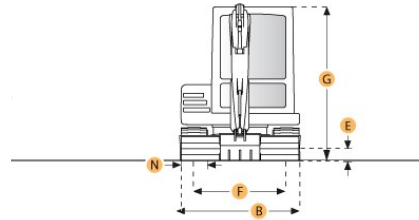


KOBELCO SK55SR-5 MIDI EXCAVATOR

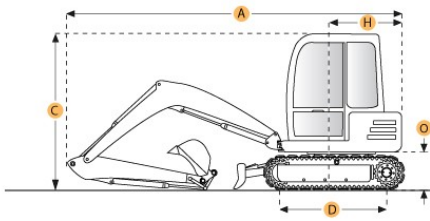

Boom/Stick Option (HEX) 1


A. SHIPPING LENGTH OF UNIT	17.2 ft in	5230 mm
C. SHIPPING HEIGHT OF UNIT	8.6 ft in	2620 mm
J. MAX LOADING HEIGHT	12.1 ft in	3680 mm
K. MAX REACH ALONG GROUND	18.9 ft in	5750 mm
L. MAX VERTICAL WALL DIGGING DEPTH	9.2 ft in	2810 mm
M. MAX DIGGING DEPTH	11.8 ft in	3590 mm

Dimensions

B. WIDTH TO OUTSIDE OF TRACKS	6.4 ft in	1960 mm
D. LENGTH OF TRACK ON GROUND	6.5 ft in	1970 mm
E. GROUND CLEARANCE	1.1 ft in	345 mm
H. TAIL SWING RADIUS	3.5 ft in	1080 mm

Undercarriage

N. SHOE SIZE	15.7 in	400 mm
--------------	---------	--------

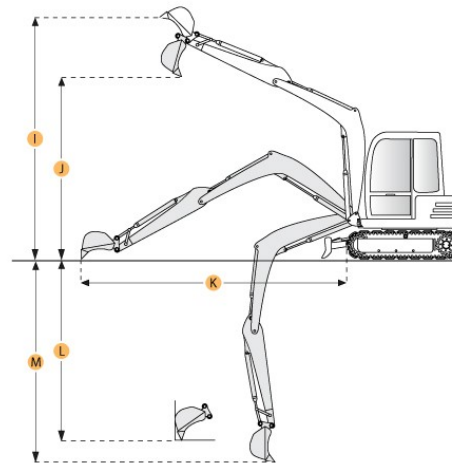

KOBELCO SK55SR-5 MIDI EXCAVATOR
Specification

Engine		
NUMBER OF CYLINDERS	4	
MAKE	2348	
MODEL	4TNV88	
GROSS POWER	39.3 hp	29.3 kw
POWER MEASURED @	2400 rpm	
DISPLACEMENT	133 cu in	2.2 L
Operational		
OPERATING WEIGHT	11287.7 lb	5120 kg
HYDRAULIC SYSTEM RELIEF VALVE PRESSURE	3335.9 psi	23000 kPa
HYDRAULIC PUMP FLOW CAPACITY	35.7 gal/min	135 L/min
Undercarriage		
SHOE SIZE	15.7 in	400 mm
MAX TRAVEL SPEED	2.9 mph	4.6 km/h
Buckets		
REFERENCE BUCKET CAPACITY	0.12 yd ³	0.09 m ³
Boom/Stick Option (HEX) 1		
SHIPPING HEIGHT OF UNIT	8.6 ft in	2620 mm
SHIPPING LENGTH OF UNIT	17.2 ft in	5230 mm
MAX DIGGING DEPTH	11.8 ft in	3590 mm
MAX REACH ALONG GROUND	18.9 ft in	5750 mm
MAX LOADING HEIGHT	12.1 ft in	3680 mm
MAX VERTICAL WALL DIGGING DEPTH	9.2 ft in	2810 mm
Dimensions		
WIDTH TO OUTSIDE OF TRACKS	6.4 ft in	1960 mm
GROUND CLEARANCE	1.1 ft in	345 mm
TAIL SWING RADIUS	3.5 ft in	1080 mm
LENGTH OF TRACK ON GROUND	6.5 ft in	1970 mm