


EP3150

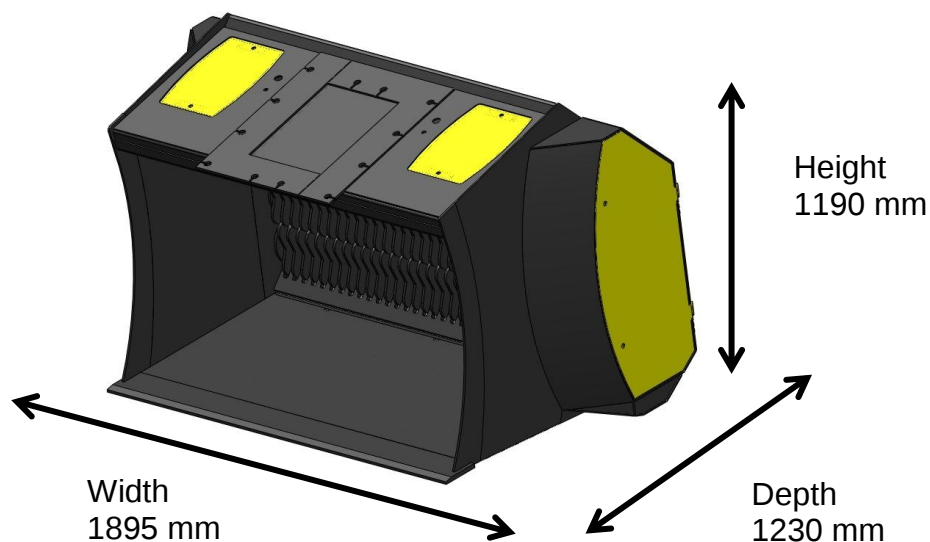

Volume ISO (m ³)	1,00
Volume SAE(m ³)	1,13
Screening area (m ²)	1,1
Mass of the bucket (kg)	1140
Default bolted plate	Remu big plate
Recommended minimum weight for excavator (tons)	12
Recommended minimum weight for wheel loader (tons)	4

Additional information:

- Uses 50 mm axels and bearing assemblies
- Rotors are built with double axel system and rotor length is 1500 mm
- Options for hydraulic motors:

Motor/motors	Max cont. pressure (bar)	Max hydraulic flow (l/min)	Recommended hydraulic flow (l/min)
OMT 315	210	125	46 - 59
OMT 400 (default)	210	125	57 - 75