

BD Drill

ROTARY DRILLING TOOLS

www.bddrill.com.au / www.bddrill.ca



Black Diamond Drilling Services Australia Pty Ltd



Rotary Drilling Tools

- IADC Codes 03
- Drilling String 05
- Blast Hole Rotary Bits 08

RECOMMENDED SAFETY PROCEDURES

The mining industry continues to demand even higher levels of safety and productivity. In order to meet these requirements, we work continuously to develop even safer products and to produce comprehensive manuals enabling safer and effective use of our products.



IT'S ALL ABOUT EVERYONE'S HEALTH

Helping you to ensure a safer workplace and healthier workforce is of the utmost importance to us. The well-being of any person coming into contact with our equipment is paramount. Therefore, we strive to identify and assess potential risk factors that could threaten the health of you and your employees. All the products in our catalogue are designed to meet safety requirements.

DRESS RIGHT FROM HEAD TO TOE

You must wear appropriate personal protective equipment (PPE) at all times. This is what we strongly recommend, to help avoid injury:

- Safety helmet
- Hearing protection
- Safety glasses
- Protective high visibility clothing
- Respiratory protection
- Safety boots
- Any site-specific PPE as required

BE AWARE OF ALL SAFETY PROCEDURES

We ask that you start by obeying all instructions given. Never work under an unsupported rood or close to potential pinch point locations. Beware of the potential hazards of a loose roof and ribs and scale down roof ribs prior to bolting. It is important to bolt early in the mining process – as soon as safely and practically possible.

Safe work procedures should incorporate inspection before the machine operates and also through regular monitoring based upon mining conditions, safety and management systems. Workers should be provided with safety information, instruction and training on transportation, installation, operational care and disposal of drilling tools.

MAKE A RISK ANALYSIS BEFORE YOU START

Pay attention to safety when planning all of your work. Before you start, always take your time to go through all operations. Identify any potential risks and take appropriate measures to avoid them. If necessary, seek expert advice on how to help minimize risks. Finally, make sure that you have the right resources to perform all tasks in the safest manner possible.

Please check www.safeworkaustralia.gov.au or www.canada.ca/en/services/jobs/workplace/health-safety.html for more information.

IADC Codes – Rotary Rock Bits

International Association of Drilling Contractors

IADC Codes make it easier for drillers to describe what kind of rock bit they are looking for to the supplier. Black Diamond follows the IADC bit classification system in which the first three digits classify the bit according to the formation it is designed to drill and the bearing/seal design used.



Example 5-4-5-R:

First Digit

- a. 1, 2 and 3 designate STEEL TOOTH BITS with 1 for soft, 2 for medium and 3 for hard formations
- b. 4, 5, 6, 7 and 8 designate TUNGSTEN CARBIDE INSERT BITS for varying formation hardness with 4 being the softest and 8 being the hardest.

Second Digit

1, 2, 3 and 4 are further breakdown of formation with 1 being the softest and 4 the hardest.

Third Digit

This digit will classify the bit according to bearing/seal type (see information on different bearing types) and special gauge wear protection as follows:

- 1. Standard open bearing roller bit/2. Standard open bearing roller bit, air-cooled
- 3. Standard open bearing roller bit with gauge protection which is defined as carbide inserts in the heel of the cone
- 4. Sealed roller bearing bit/5. Sealed roller bearing bit with gauge protection
- 6. Journal sealed bearing bit/7. Journal sealed bearing bit with gauge protection

Fourth Digit


The following letter codes are used in the fourth digit position to indicate additional features:

A-Air Application / R-Reinforced Welds / C-Center Jet / S-Standard Steel Tooth / D-Deviation Control / X-Chisel insert / E-Extended Jet / Y-Conical Insert / G-Extra Gauge Protection / Z-Other Insert Shape / J-Jet Deflection

Bearing Types

There are primarily four (4) types of bearing used in tricone drilling bits:

- 1.) STANDARD OPEN BEARING ROLLER BIT: On these bits the cones will spin freely. This type of bit has a front row of ball bearings and a back row of roller bearings.
- 2.) STANDARD OPEN BEARING ROLLER BIT FOR AIR DRILLING: Cones are similar to #1, but have air injection directly to the cones to cool the bearings. Air flows into the cone through the passage ways inside the pin. (Not for mud applications)
- 3.) SEALED BEARING ROLLER BITS: These bits have an O-Ring seal with a grease reservoir for bearing cooling. The seal acts as a barrier against mud and cuttings to protect the bearings.
- 4.) JOURNAL BEARING ROLLER BITS: These bits are strictly oil/grease cooled worth nose bearings, O-Ring seal and a race for maximum performance.

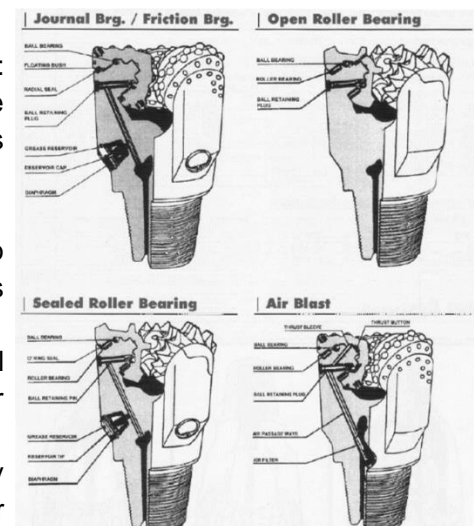

Please check <https://www.iadc.org/drillbits/> for more information

Product Features

Fast Penetration

The cutting structures are designed to perform efficiently and increase the bit life of a variety of insert shapes.

Carbide

Multiple grade selection for different rows of inserts based on function.

INTERIOR ROW INSERTS

Interior row inserts are critical for high bit life and sustained penetration rates. We select the best inserts for your application specific products.



GAGE ROW INSERTS

We offer a range of gage row insert shapes suited to all drilling applications. Insert selection is optimised for all bits in our product range.



Optimised nozzle orientation

Nozzle size and orientation are optimised for efficient evacuation of cuttings.

BACKFLOW VALVES

Backflow valves act as a check valve limiting ingress of water and cuttings to the bit body. This increases the bearing life and reduces the incidence of bearing failure.




Rotary Drill String




| Rotary Drill String | |
|---------------------|-------------------|
| 1 | Shock Sub |
| 2 | Saver Sub/Top Sub |
| 3 | Drill pipe |
| 4 | Starter pipe |
| 5 | Bit Sub |
| 6 | Roller Stabilizer |
| 7 | Rotary Deck Bush |

CAT(REEDRILL, SKS, SKF, MD) CAT(BUCYRUS)

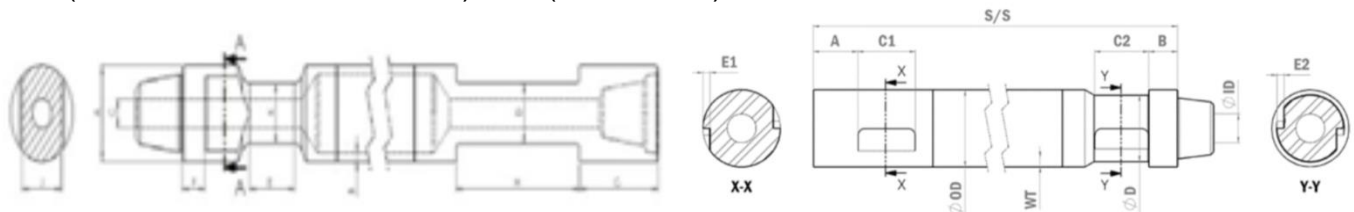

ATLAS COPCO(PIT-VIPER) Sandvik Driltech(T25KW/D25/40/50/75/90)

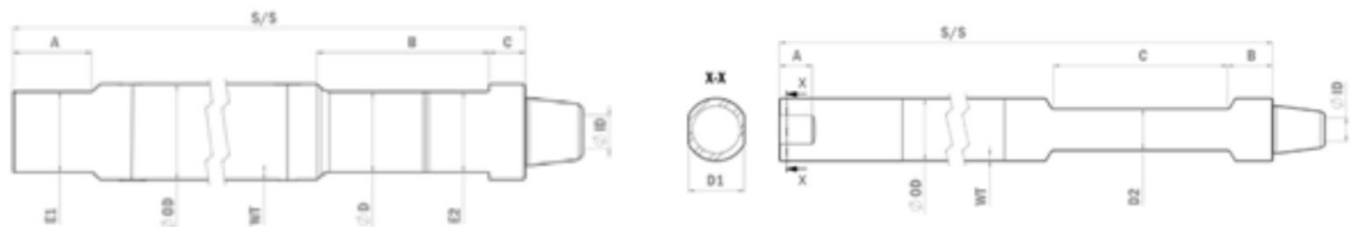

Rotary Drilling Pipe

| Pipe type | Connection type | Thread type | OD | Should to Should(SS) Length | Flats | Wall Thickness |
|-----------|-----------------|-------------|--------|-----------------------------|-------|----------------|
| SKS/SKF | BOX-PIN | | 7" | | 127 | |
| PIT VIPER | PIN-PIN | API or Beco | 7-5/8" | 6ft/25ft/30ft/35ft/40ft... | 140 | 1" or 3/4" |
| DRILLTECH | BOX-BOX | | 8" | | 165 | |



Bit Sub/Saver Sub/Spindle Sub

| Pipe type | Connection type | Thread type | OD | Should to Should(SS) Length | Flats |
|-----------|-----------------|-------------|--------|-----------------------------|-------|
| SKS/SKF | BOX-PIN | | 7" | | 127 |
| PIT VIPER | PIN-PIN | API or Beco | 7-5/8" | 17"/19"/37"/42" | 140 |
| DRILLTECH | BOX-BOX | | 8" | | 165 |



BLACK DIAMOND DRILLING SERVICES AUSTRALIA

World-class drilling equipment and tools

CLOUDBREAK PIT VIPER 271

7" (178mm) Drill String / Min OD 165mm / 146mm Spanner Flats

| Spindle Sub | |
|-------------|--------------------------------|
| Part # | SUB-PREG568BBEC0412-178/SSL800 |
| Pin Thread | 6 5/8" API |
| Box Thread | 4 1/2" BECO |
| Shoulder | 800mm |
| Weight | 146kg |

| Saver Sub | |
|------------|-------------------------|
| Part # | SUB-PBBEC0412-178/SS400 |
| Pin Thread | 4 1/2" API |
| Box Thread | 4 1/2" BECO |
| Shoulder | 400mm |
| Weight | 67kg |

| Drill Pipe x 2 | |
|----------------|-------------------------------|
| Part # | ROD-ROT-178/25FT/25.4 BECO412 |
| Pin Thread | 4 1/2" BECO |
| Box Thread | 4 1/2" BECO |
| Shoulder | 7620mm |
| Weight | 785kg |

| Extension Sub | |
|---------------|--------------------------------|
| Part # | SUB-PBEC0412BREG412-178/SS1800 |
| Pin Thread | 4 1/2" BECO |
| Box Thread | 4 1/2" API |
| Shoulder | 1800mm |
| Weight | 315kg |

| Lifting Bail | |
|--------------|------------------------|
| Part # | TOOL-LBAIL-BECO 412-AL |
| Box Thread | 4 1/2 BECO |
| Part # | TOOL-LBAIL-REG658-AL |
| Box Thread | 6 5/8 API |
| Part # | TOOL-LBAIL-REG412-AL |
| Box Thread | 4 1/2" API |

| Bit Basket | |
|--------------------------|--|
| RIG-BBASKET-PV271-ROT203 | |
| RIG-BBASKET-PV271-ROT229 | |

| Deck Bushes | |
|-------------------------|--|
| 3250D Triple Race | |
| DBUSH -TR-PV271-178/325 | |
| 3250D Light Weight | |
| DBUSH -TR-PV271-178/325 | |

| Bit Sub (9 7/8" Rotary) | |
|-------------------------|----------------------------|
| Part # | SUB-P421B658REG-178/SS1800 |
| Pin Thread | 4 1/2" API |
| Box Thread | 6 5/8" API |
| Shoulder | 1200mm |
| Weight | 230kg |

| Bit Sub (9" Rotary) | |
|---------------------|-------------------------|
| Part # | SUB-PB412REG-178/SS1200 |
| Pin Thread | 4 1/2" API |
| Box Thread | 4 1/2" API |
| Shoulder | 1200mm |
| Weight | 220kg |



IADC435

Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 435 | 4 1/2" & 6 5/8" API REG | 34/38/50/65/74/104 |

IADC: 435 – TCI sealed roller bearing bit with gauge protection for soft formations with low compressive strength and high drillability.

Compressive Strength:

- 65-85 MPA
- 9,000-12,000 PSI



Ground Description:

Long intervals of very soft poorly compacted shales, dolomites, sandstones, clays, salts and limestones.

| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit: 9,880-39,500 |
| Circulation Type | Rotary Speed: 80 – 110 RPM |
| Jet Air | Air Back Pressure: 0.2 – 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Ogive | Gage Row: Chisel |
| Gage Level Protection: Round | Hardmetal and wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. – Redesigned, 2007

IADC545

Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 545 | 4 1/2" & 6 5/8" API REG | 34/38/50/65/74/104 |

IADC: 545 – TCI sealed roller bearing bit with gauge protection for soft to medium formations with low compressive strength.

Compressive Strength:

- 155 - 193 MPA
- 22,500 – 28,000 PSI

Ground Description:

Medium hard and abrasive rocks such as sandstone with streaks of quartz, hard limestone or chert, hematite ores, hard well compacted abrasive rock such as: sandstones with quartz binder, dolomites, quartzite shales, magma and metamorphic coarse-grained rocks



| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit: 18,000 – 45,000 |
| Circulation Type | Rotary Speed: 80 – 110 RPM |
| Jet Air | Air Back Pressure: 0.2 – 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Conical | Gage Row: Off-set Chisel |
| Gage Level Protection: Round | Hardmetal and wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. – Redesigned, 2007

IADC635

Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 635 | 4 1/2" & 6-5/8" API REG | 34/38/50/65/74/104 |

IADC: 635 - TCI sealed roller bearing bit with gauge protection for medium hard formations with high compressive strength.

Compressive Strength:

- 85-100 MPA
- 12,000-14,500 PSI



Ground Description:

Hard, well-compacted rocks such as: hard silica limestones, quartzite streaks, pyrite ores, hematite ores, magnetite ores, chromium ores, phosphorite ores, and granites



| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit:19,750-49,380 |
| Circulation Type | Rotary Speed:80 - 110RPM |
| Jet Air | Air Back Pressure:0.2 - 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Conical | Gage Row: Chisel |
| Gage Level Protection: Round | Hardmetal on lug; Wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. - Redesigned, 2007

IADC645A


Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 645A | 4 1/2" & 6-5/8" API REG | 34/38/50/65/74/104 |

IADC: 645 - TCI sealed roller bearing bit with gauge protection for medium hard formations with high compressive strength.

Compressive Strength:

- 85-100 MPA
- 12,000-14,500 PSI

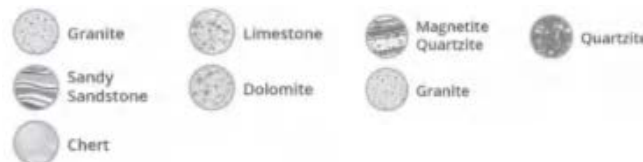

Ground Description:

Hard, well-compacted rocks such as: hard silica limestones, quartzite streaks, pyrite ores, hematite ores, magnetite ores, chromium ores, phosphorite ores, magnetite and granites



| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit:19,750-49,380 |
| Circulation Type | Rotary Speed:80 - 110RPM |
| Jet Air | Air Back Pressure:0.2 - 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Conical | Gage Row: Conical |
| Gage Level Protection: Conical | Hardmetal on lug; Wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. - Redesigned, 2007

IADC735

Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 735 | 4 1/2" & 6-5/8" API REG | 34/38/50/65/74/104 |

IADC: 735 - TCI sealed roller bearing bit with gauge protection for hard semi-abrasive and abrasive formations.

Compressive Strength:

- 155 - 193 MPA
- 22,500 - 28,000 PSI



Ground Description:

Hard, well-compacted rocks such as: hard silica limestones, quartzite streaks, pyrite ores, hematite ores, magnetite ores, chromium ores, phosphorite ores, and granites

| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit: 15750 - 39380 |
| Circulation Type | Rotary Speed: 80 - 110RPM |
| Jet Air | Air Back Pressure: 0.2 - 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Conical | Gage Row: Chisel |
| Gage Level Protection: Flat-top | Hardmetal and wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. - Redesigned, 2007

IADC845


Bit Description

| Bit Size (mm) | IADC Code | Pin Connection | Weight (Kg) |
|-------------------------|-----------|-------------------------|--------------------|
| 200/216/229/251/270/311 | 845 | 4 1/2" & 6-5/8" API REG | 34/38/50/65/74/104 |

IADC: 845 - TCI sealed roller bearing bit with gauge protection for extremely hard and abrasive formation.

Compressive Strength:

- 155 - 193 MPA
- 22,500 - 28,000 PSI



Ground Description:

Hard, well-compacted rocks such as: hard silica limestones, quartzite streaks, pyrite ores, hematite ores, magnetite ores, chromium ores, phosphorite ores, and granites

| Product Specification | Technical |
|---|---|
| Bearing Type | Operating Suggestions |
| Roller-Ball-Roller-Thrust Button/Sealed Bearing | Weight on Bit: 9,880-39,500 |
| Circulation Type | Rotary Speed: 80 - 110RPM |
| Jet Air | Air Back Pressure: 0.2 - 0.4 |
| Cutting Structure | |
| Inner and Nose Rows: Ovoid | Gage Row: Ovoid |
| Gage Level Protection: Flat-top | Hardmetal and wear resistant carbide on shirttail lip and lug |

Based on the IADC Bit Classification System located in the IADC Drilling Manual, 11th Ed. - Redesigned, 2007



BD Drill

Black Diamond Drilling Services Australia Pty Ltd

WA Headquarter: 52 Distinction road, Wangara WA 6065

Tel: +61-08-6365-6550 **Email:** sales@bddrill.com.au **Web:** www.bddrill.com.au

Queensland Warehouse: 9A Formation St, Wacol QLD 4076

Black Diamond Drilling Tools Canada Inc.

Sudbury Headquarter: 1899 Lasalle Blvd. Unit 6, Sudbury, On, Canada, P3A-2A3

Tel: +1-705-560-5888 **Email:** sales@bddrill.ca **Web:** www.bddrill.ca

Black Diamond Drilling Tools USA LLC.

New Hampshire Headquarter: 131 Daniel Webster Hwy, #426 Nashua, NH 03060

Tel: +1-978-319-8000 **Email:** sales@bddrill.us **Web:** www.bddrill.us

Black Diamond Drilling Mongolia LLC

Ulan Bator Headquarter: No.206, Second floor, Arig Center Jamyan Gun Street, 1st Khoroo, Sukhbaatar district, Ulaanbaatar, Mongolia

Tel: +976-99623888 **Email:** sales@bddrilling.mn



Version 5